


# Safe distance for 10kV ADSS fiber optic cable

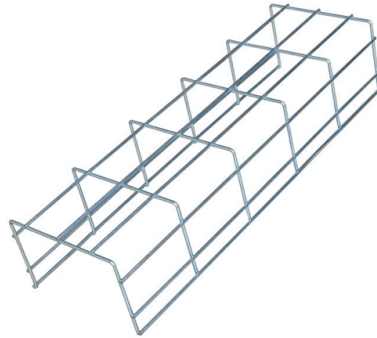

## Overview

The ADSS cable reel (pay-off) must be located directly in line with the first traveler and must be back from the structure four times the height of the traveler (4:1 distance to height ratio). This guide provides general recommendations for the selection of methods, equipment, and tools for the stringing of ADSS (All Dielectric Self-supporting) fiber optic cables including short and Long Span ADSS cables. Each installation will be influenced by local conditions. (FOA) was founded in 1995 to help develop the workforce to build the fiber optic networks to support a rapid expansion in communications and the Internet. AFL-ADSS® (All-Dielectric Self-Supporting) cable is ideal for installation in distribution as well as transmission environments. A safe distance must be maintained from power lines of different voltage levels: greater than 1.5m for 110KV, and greater than 3.2m for 230KV. The cable shall be used for aerial installation in accordance with IEC, ITU-T and EIA Recommendation or better. The cable shall have a minimum life expectancy of 25 years without any aging. The cable shall be protected by a metal cover firmly secured to the flange. A protective wrap shall be used.

## Article Content

1222-2019

It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

[ADSS Fiberoptic Cable Guide | PDF | Optical Fiber | Cable](#)

The cables are designed for short, medium and long span distances and offer rapid deployment along existing rights-of-way. Tables provide specifications for typical mechanical properties, common cable ...

[ADSS Cable Installation Guidelines | PDF | Cable | Optical Fiber](#)

Safety is the top priority, as the cable can become conductive from contaminants. Proper handling and installation techniques are required to ensure long service life of the cable.

[IEEE Standard for Testing and STANDARDS](#)

This standard provides both construction and performance requirements for maintenance of the proper optical fiber integrity and optical transmission capabilities of ADSS cable.

[OPTICAL FIBER CABLE SPECIFICATION \(ADSS-Span= 100m\)](#)

[5. Optical Fiber Cable Characteristics 5.1 The Mechanical and Environmental Performance of the Cable ... 5.2 Installation Conditions](#)

[ADSS Fiber Optic Cable Specifications Explained | Structure ...](#)

Explore the complete specifications of ADSS fiber optic cables, including structure details, mechanical performance, optical characteristics, and environmental resistance. Learn how to choose ...

[Basic requirements for ADSS optical cable construction](#)

A safe distance must be maintained from power lines of different voltage levels: greater than 1.0m for 35KV, greater than 1.5m for 110KV, and greater than 3.0m for 220KV.

[AFL-ADSS® \(All-Dielectric Self-Supporting\) fiber optic cable is a non ...](#)

Flex-Span designs are optimized for a broader combination of fiber counts and span lengths, providing ADSS system designers more flexibility in their product selection.

[Installation of Solo® ADSS All-Dielectric Self-Supporting Fiber ...](#)

Like other fiber optic cables, ADSS cable weighs less than equivalent copper cables and will tend to sag less over a given aerial span. Because of this, it should occupy the uppermost available ...

## FOA Standard For Installing Fiber Optic Cable Plants

Since building systems may require many types of cables, both fiber and copper, these cables should be separated to protect the fiber cables from damage and all cables marked properly.

### ADSS Fiber Optic Cables

The ADSS cable shall be sagged from the pay-off (cable reel) end and work back toward the take-up equipment starting with the deadend at the first structure near the cable reel.

### Flex-Span ADSS Fiber Optic Cable Fiber Optic Cable

Actual link distances may be constrained by attenuation, depending on specific loss budget. continued

## Contact Us

For more information, pricing, or custom solutions, please contact us:

Website: <https://www.automationauthoritiesolar.co.za>

Email: [info@automationauthoritiesolar.co.za](mailto:info@automationauthoritiesolar.co.za)

Phone: +27 82 547 3961

Address: 15 Quantum Street, Technopark, Centurion, 0157, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

